


Standard Features

- Designed for use in truck scale applications to prevent spillover into the pit
- Impact, tear and weather-resistant EPDM rubber
- Barbed web to hold molding in place
- Web thickness 0.22 in (5.6 mm)
- Available by the foot or 10.0 ft (3.1 m), 11.0 ft (3.4 m), 70.0 ft (21.34 m), 80.0 ft (24.4 m) and 100.0 ft (30.5 m) lengths
- Maximum continuous length is 450 ft (137 m)

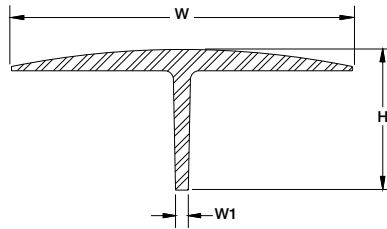

Part Number/Price


| Part# | H | W | W1 | Length | Price | | | |
|-------|---------|---------|---------|----------|---------|--------|------------------|------------|
| 18799 | 2.56 in | 65.0 mm | 5.75 in | 146.1 mm | 0.22 in | 5.6 mm | Sold by the foot | Consult/ft |
| 18800 | 2.56 in | 65.0 mm | 5.75 in | 146.1 mm | 0.22 in | 5.6 mm | 10 ft 3.05 m | Consult |
| 18801 | 2.56 in | 65.0 mm | 5.75 in | 146.1 mm | 0.22 in | 5.6 mm | 11 ft 3.35 m | Consult |
| 18802 | 2.56 in | 65.0 mm | 5.75 in | 146.1 mm | 0.22 in | 5.6 mm | 70 ft 21.34 m | Consult |
| 33219 | 2.56 in | 65.0 mm | 5.75 in | 146.1 mm | 0.22 in | 5.6 mm | 80 ft 24.4 m | Consult |
| 33222 | 2.56 in | 65.0 mm | 5.75 in | 146.1 mm | 0.22 in | 5.6 mm | 100 ft 30.5 m | Consult |

Note: Maximum continuous length is 450 ft. Call for price and availability.

T-Strip Molding

Standard Features

- Designed for use in truck scale applications to prevent spillover into the pit
- Impact, tear and weather-resistant SBR rubber
- Web thickness 0.25 in (6.4 mm)
- Available by the foot or 10.0 ft (3.1 m), 11.0 ft (3.4 m), 70.0 ft (21.34 m), 80.0 ft (24.4 m) and 100.0 ft (30.5 m) lengths
- Maximum continuous length is 450 ft (137 m)

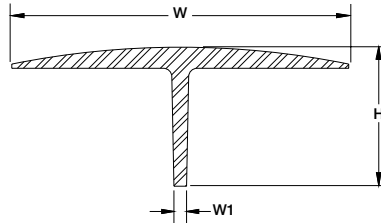

Part Number/Price

| Part# | H | W | W1 | Length | Price | | | |
|-------|---------|---------|---------|----------|---------|--------|------------------|------------|
| 18736 | 2.00 in | 50.8 mm | 4.50 in | 114.3 mm | 0.25 in | 6.4 mm | Sold by the foot | Consult/ft |
| 18776 | 2.00 in | 50.8 mm | 4.50 in | 114.3 mm | 0.25 in | 6.4 mm | 10 ft/3.05 m | Consult |
| 18797 | 2.00 in | 50.8 mm | 4.50 in | 114.3 mm | 0.25 in | 6.4 mm | 11 ft/3.35 m | Consult |
| 18798 | 2.00 in | 50.8 mm | 4.50 in | 114.3 mm | 0.25 in | 6.4 mm | 70 ft/21.34 m | Consult |
| 33223 | 2.00 in | 50.8 mm | 4.50 in | 114.3 mm | 0.25 in | 6.4 mm | 80 ft/24.4 m | Consult |
| 33224 | 2.00 in | 50.8 mm | 4.50 in | 114.3 mm | 0.25 in | 6.4 mm | 100 ft/30.5 m | Consult |

Note: Maximum continuous length is 450 ft. Call for price and availability.