

RL2100 HE

Heavy-capacity Weigh Modules



Picture is a representation of actual product

Incorporating an articulating load plate, hardened load pin and double-ended beam load cell into one simple design, the RL2100HE tolerates eccentric loads and side loads of up to 100 percent of capacity. The RL2100 HE comes standard with NTEP Certified, 1:5000 division Class III L load cells, yielding up to 0.02 percent total error. An integral conduit adapter offers added washdown protection. These standard features give the RL2100 HE accuracy and dependability in one heavyweight package. The simple load introduction and load cell design provides consistent accuracy in washdown applications, making the RL2100 HE ideal for high-capacity hostile environments.

Standard Features

- All stainless steel construction
- Welded seal, stainless steel load cells, IP67, guaranteed waterproof
- NTEP Certified load cells, 5000d, Class III L/10,000d, Class III L multiple cell
- Bolt-in-place design; module bolts directly to tank leg without requiring additional load buttons or mounting plates
- Self-checking design
- Two-year limited warranty

Applications


- Heavy-capacity tanks, blenders, reactors and bulk inventory management
- Petroleum refining process control
- Blending/batching

Complete Kit Includes

- 1 JB4SS NEMA Type 4X stainless steel signal-trim junction box
- 3 or 4 RL2100HE stainless steel compression mounts
- 3 or 4 RL75060S stainless steel, welded seal double-ended beam load cells
- 25 ft of our hostile environment EL147HE SURVIVOR® load cell cable

Load Cell Certifications



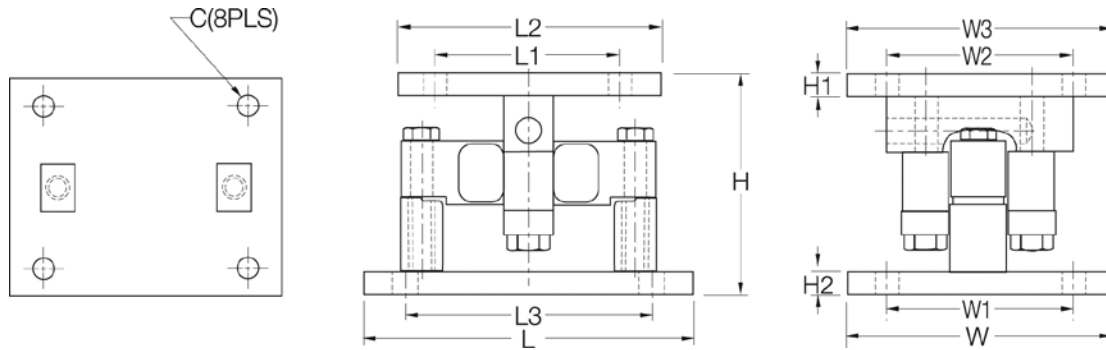

Dimensions

Rated Capacity	C	H	H1	H2	L	L1	L2	L3	W	W1	W2	W3
lb/in												
20,000-25,000	0.78	6.85	0.75	0.75	10.00	6.00	8.00	7.50	8.00	6.00	6.00	8.00
35,000-100,000	1.13	9.42	1.00	1.00	16.00	6.50	9.00	11.50	10.00	7.50	6.50	9.00
kg/mm												
9,071.9-11,339.8	19.8	174.0	19.1	19.1	254.0	152.4	203.2	190.5	203.2	152.4	152.4	203.2
15,875.7-45,359.2	28.7	239.3	25.4	25.4	355.6	165.1	228.6	292.1	254.0	190.5	165.1	228.6

Order Information

Load Rating (Per Module)	Part#	Price
Single Module (Includes Load Cell)		
20,000 lb	9,071.8 kg	32951
25,000 lb	11,339.8 kg	65541
35,000 lb	15,875.7 kg	32952
50,000 lb	22,679.6 kg	32953
60,000 lb	27,215.5 kg	32954
75,000 lb	34,019.4 kg	32955
100,000 lb	45,359.2 kg	32956
3-Module Kit		
20,000 lb	9,071.8 kg	32970
25,000 lb	11,339.8 kg	65984
35,000 lb	15,875.7 kg	32969
50,000 lb	22,679.6 kg	32968
60,000 lb	27,215.5 kg	32967
75,000 lb	34,019.4 kg	32966
100,000 lb	45,359.2 kg	32965
4-Module Kit		
20,000 lb	9,071.8 kg	32964
25,000 lb	11,339.8 kg	65983
35,000 lb	15,875.7 kg	32963
50,000 lb	22,679.6 kg	32962
60,000 lb	27,215.5 kg	32961
75,000 lb	34,019.4 kg	32960
100,000 lb	45,359.2 kg	32959

