

# IQ Plus® 2100

Digital Bench Scale



*IQ plus 2100 with attachment bracket*



*IQ plus 2100 with column*



*IQ plus 2100 with tilt stand*

## Standard Features

- NEMA Type 4X/IP66
- 304 stainless steel construction
- Large, bold 0.8 in light emitting diode (LED) display
- Status annunciations: lb, kg, oz, g, negative, motion, center of zero
- One full-duplex RS-232 port
- Two digital inputs for remote zero, print and units
- 12 in column, attachment bracket or tilt stand for table, wall or under counter mounting
- Aluminum, single-point load cell
- Overload and upload stops on scale base
- Stainless steel, non-tactile feel, piezo zero and units buttons
- Unit of measure: kg, gm, lb, oz, lb/oz (lb/oz is not Legal for Trade)
- PreVent™ breather vent


## Approvals




Measurement  
Canada  
Approved

Platform Dimensions	L	L1
10 x 10 in (254 x 254 mm)	10.25 in (260.4 mm)	10 in (254 mm)
12 x 12 in (304.8 x 304.8 mm)	12.25 in (311.2 mm)	12 in (304.8 mm)

*See BenchMark® Series—Stainless Steel for 12 x 18 in, 18 x 18 in, 18 x 24 in, and 24 x 24 in detailed platform dimensions*

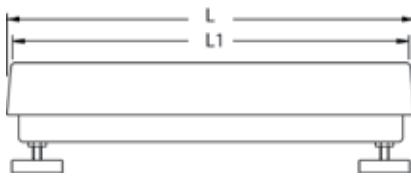

*With attachment bracket*

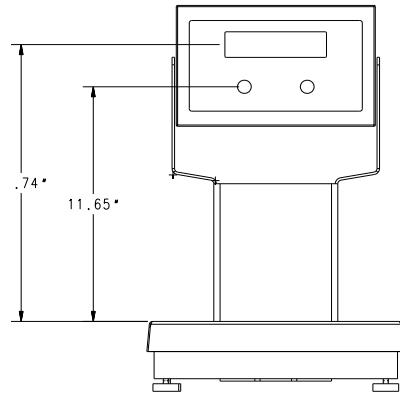

*With column*

## Specifications

### Line Voltages:

115 or 230VAC

### Frequency:

50 or 60 Hz

### Power Consumption:

70 mA at 115VAC (8W)

35 mA at 230VAC (8W)

### Display Resolution:

10,000 dd

### Digital Inputs:

Two inputs, TTL or switch closure, active-low

### Serial Communications:

Full-duplex RS-232; 9600, 4800, 2400, 1200 bps;  
seven or eight data bits; even, odd or no parity

### Display:

Six-digit light emitting diode (LED) display  
Seven-segment, 0.8 in (20 mm) digits

### LED Annunciators:

Negative value, center of zero, motion, kg, g, lb, oz

### Keypad:

Two stainless steel piezo switches

### Operating Temperature:

14°F to 104°F (-10°C to 40°C)

### Rating/Material:

NEMA Type 4X/IP66, stainless steel

### Warranty:

Two-year limited warranty

### Approvals:

#### Indicator:

NTEP CC 00-045 Class III/IIL 10,000 d

Measurement Canada AM-5374;

UL and C-UL listed

#### Base:

NTEP CC 95-072, Class III 5,000 d

## Part Number/Price

Part #	Capacity	Platform Size*	Column Height	Est. Weight	Price
<b>IQ plus 2100 with tilt stand - 115 VAC</b>					
63053 <sup>t</sup>	5 lb x 0.001 lb (2.5 kg x 0.0005 kg) (2,500 g x 0.5 g) (80 oz x 0.02 oz)	10 x 10 in		23 lb	Consult
63052 <sup>t</sup>	10 lb x 0.002 lb (5 kg x 0.001 kg) (5,000 g x 1 g) (160 oz x 0.05 oz)	10 x 10 in		23 lb	Consult
63051 <sup>t</sup>	25 lb x 0.005 lb (10 kg x 0.002 kg) (10,000 g x 2 g) (400 oz x 0.10 oz)	10 x 10 in		23 lb	Consult
63050 <sup>t</sup>	50 lb x 0.01 lb (25 kg x 0.005 kg) (25,000 g x 5 g) (800 oz x 0.20 oz)	12 x 12 in		26 lb	Consult
63049 <sup>t</sup>	100 lb x 0.02 lb (50 kg x 0.01 kg) (50,000 g x 10 g) (1,600 oz x 0.50 oz)	12 x 12 in		26 lb	Consult
<b>IQ plus 2100 with attachment bracket - 115 VAC</b>					
63043 <sup>t</sup>	5 lb x 0.001 lb (2.5 kg x 0.0005 kg) (2,500 g x 0.5 g) (80 oz x 0.02 oz)	10 x 10 in		23 lb	Consult
63042 <sup>t</sup>	10 lb x 0.002 lb (5 kg x 0.001 kg) (5,000 g x 1 g) (160 oz x 0.05 oz)	10 x 10 in		23 lb	Consult
63041 <sup>t</sup>	25 lb x 0.005 lb (10 kg x 0.002 kg) (10,000 g x 2 g) (400 oz x 0.10 oz)	10 x 10 in		23 lb	Consult
63040 <sup>t</sup>	50 lb x 0.01 lb (25 kg x 0.005 kg) (25,000 g x 5 g) (800 oz x 0.20 oz)	12 x 12 in		26 lb	Consult
63039 <sup>t</sup>	100 lb x 0.02 lb (50 kg x 0.01 kg) (50,000 g x 10 g) (1,600 oz x 0.50 oz)	12 x 12 in		26 lb	Consult
<b>IQ plus 2100 - 115 VAC</b>					
63048 <sup>t</sup>	5 lb x 0.001 lb (2.5 kg x 0.0005 kg) (2,500 g x 0.5 g) (80 oz x 0.02 oz)	10 x 10 in	12 in	25 lb	Consult
63047 <sup>t</sup>	10 lb x 0.002 lb (5 kg x 0.001 kg) (5,000 g x 1 g) (160 oz x 0.05 oz)	10 x 10 in	12 in	25 lb	Consult
63046 <sup>t</sup>	25 lb x 0.005 lb (10 kg x 0.002 kg) (10,000 g x 2 g) (400 oz x 0.10 oz)	10 x 10 in	12 in	25 lb	Consult
63045 <sup>t</sup>	50 lb x 0.01 lb (25 kg x 0.005 kg) (25,000 g x 5 g) (800 oz x 0.20 oz)	12 x 12 in	12 in	28 lb	Consult
63044 <sup>t</sup>	100 lb x 0.02 lb (50 kg x 0.01 kg) (50,000 g x 10 g) (1,600 oz x 0.50 oz)	12 x 12 in	12 in	28 lb	Consult
<b>IQ plus 2100 - 230 VAC</b>					
63063 <sup>tt</sup>	5 lb x 0.001 lb (2.5 kg x 0.0005 kg) (2,500 g x 0.5 g) (80 oz x 0.02 oz)	10 x 10 in	12 in	25 lb	Consult
63062 <sup>tt</sup>	10 lb x 0.002 lb (5 kg x 0.001 kg) (5,000 g x 1 g) (160 oz x 0.05 oz)	10 x 10 in	12 in	25 lb	Consult
63061 <sup>tt</sup>	25 lb x 0.005 lb (10 kg x 0.002 kg) (10,000 g x 2 g) (400 oz x 0.10 oz)	10 x 10 in	12 in	25 lb	Consult
63060 <sup>tt</sup>	50 lb x 0.01 lb (25 kg x 0.005 kg) (25,000 g x 5 g) (800 oz x 0.20 oz)	12 x 12 in	12 in	28 lb	Consult
63059 <sup>tt</sup>	100 lb x 0.02 lb (50 kg x 0.01 kg) (50,000 g x 10 g) (1,600 oz x 0.50 oz)	12 x 12 in	12 in	28 lb	Consult
<b>IQ plus 2100 - 115 VAC</b>					
72476 <sup>t</sup>	50 lb x 0.01 lb (25 kg x 0.005 kg) (25,000 g x 5 g) (800 oz x 0.02 oz)	12 x 18 in	18 in	37 lb	Consult
72477 <sup>t</sup>	100 lb x 0.02 lb (50 kg x 0.01 kg) (50,000 g x 10 g) (1,600 oz x 0.50 oz)	12 x 18 in	18 in	37 lb	Consult
72478 <sup>t</sup>	50 lb x 0.01 lb (25 kg x 0.005 kg) (25,000 g x 5 g) (800 oz x 0.02 oz)	18 x 18 in	18 in	68 lb	Consult
72479 <sup>t</sup>	150 lb x 0.05 lb (75 kg x 0.02 kg) (75,000 g x 20 g) (2,400 oz x 0.50 oz)	18 x 18 in	18 in	68 lb	Consult
72480 <sup>t</sup>	300 lb x 0.1 lb (150 kg x 0.05 kg) (150,000 g x 50 g) (4,800 oz x 1 oz)	18 x 18 in	18 in	68 lb	Consult
72481 <sup>t</sup>	500 lb x 0.1 lb (250 kg x 0.05 kg) (250,000 g x 50 g) (8,000 oz x 2 oz)	18 x 18 in	18 in	68 lb	Consult
72482 <sup>t</sup>	50 lb x 0.01 lb (25 kg x 0.005 kg) (25,000 g x 5 g) (800 oz x 0.02 oz)	18 x 24 in	18 in	78 lb	Consult
72483 <sup>t</sup>	150 lb x 0.05 lb (75 kg x 0.02 kg) (75,000 g x 20 g) (2,400 oz x 0.50 oz)	18 x 24 in	18 in	78 lb	Consult
72484 <sup>t</sup>	300 lb x 0.1 lb (150 kg x 0.05 kg) (150,000 g x 50 g) (4,800 oz x 1 oz)	18 x 24 in	18 in	78 lb	Consult
72485 <sup>t</sup>	500 lb x 0.1 lb (250 kg x 0.05 kg) (250,000 g x 50 g) (8,000 oz x 2 oz)	18 x 24 in	18 in	78 lb	Consult
72486 <sup>t</sup>	1,000 lb x 0.2 lb (500 kg x 0.1 kg) (500,000 g x 100 g) (16,000 oz x 5 oz)	18 x 24 in	18 in	78 lb	Consult
72487 <sup>t</sup>	150 lb x 0.05 lb (75 kg x 0.02 kg) (75,000 g x 20 g) (2,400 oz x 0.50 oz)	24 x 24 in	18 in	84 lb	Consult
72488 <sup>t</sup>	300 lb x 0.1 lb (150 kg x 0.05 kg) (150,000 g x 50 g) (4,800 oz x 1 oz)	24 x 24 in	18 in	84 lb	Consult
72489 <sup>t</sup>	500 lb x 0.1 lb (250 kg x 0.05 kg) (250,000 g x 50 g) (8,000 oz x 2 oz)	24 x 24 in	18 in	84 lb	Consult
72490 <sup>t</sup>	1,000 lb x 0.2 lb (500 kg x 0.1 kg) (500,000 g x 100 g) (16,000 oz x 5 oz)	24 x 24 in	18 in	84 lb	Consult

 <sup>t</sup> NEMA 5-15 plug

 <sup>tt</sup> CEE 7/7 plug

## Options/Accessories

Part #	Description	Price
64123	Remote switch for zero, units and print (non-washdown)	Consult
N/A	RLPWM15 stainless steel load cell (replacing standard aluminum load cell on 10 x 10 in or 12 x 12 in bases only)	+85.00 list price add on
N/A***	18 in column replacing standard 12 in column	+50.00 list price add on
53415	Additional operation manual	Consult

\* To convert inches to millimeters: Multiply inch measurement by 25.4

\*\* Not recommended for use with scale bases smaller than 12 x 12 in