




RoughDeck® BDP Mild Steel

Barrel, Drum, Pallet Scale – Stationary Model

FLOOR SCALES

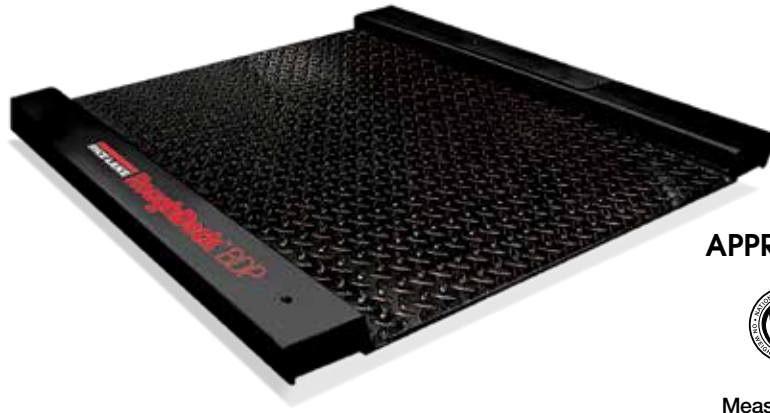

APPROVALS



Measurement
Canada
Approved



Specifications

End Load Capacity:

- 1,000 lb: 100% full scale
- 2,500 lb: 80% full scale

Cable Length:

10 ft (3 m)

Threaded Eyebolt:

Hole (1/2-13NC) located in center of deck for easy lifting

Warranty:

RoughDeck BDP weldment three years, load cells two years, all other components one year

Approvals:

NTEP CC 03-060, Class III 2,500d
Measurement Canada AM-5578
(500 kg) Class III 2,500d
(1,000 kg) Class III 2,000d

Standard Features

- Live siderails
- Top access foot adjustment holes (holes are 1/2-13 threaded for lifting scale)
- Four adjustable stainless steel SUREFOOT™ support feet
- TuffSeal® JB4SS stainless steel, NEMA Type 4X junction box with signal trim card
- Treaded top plate
- Alloy steel load cells

Part Number/Price


Part #	Size (W x L) Not Including Side Rails	Capacity (Canadian Approved Capacities)	Est. Weight	Price
77962	30 in x 31 in	1,000 lb (500 kg)	205 lb	Consult
77963	30 in x 31 in	2,500 lb (1,000 kg)	205 lb	Consult
77964	36 in x 37 in	1,000 lb (500 kg)	265 lb	Consult
77965	36 in x 37 in	2,500 lb (1,000 kg)	265 lb	Consult
Access Ramps				
78011	30 in x 12 in (sold individually)		25 lb	Consult
78012	36 in x 12 in (sold individually)		30 lb	Consult

Options/Accessories

Part #	Description	Price
18777	Floor anchor plates, mild steel, set of 2 (for use with static scale, without ramps)	Consult
19352	RoughDeck floor stand for indicator, 36.3 in high, mild steel (for use with static scale)	Consult
126384	RoughDeck floor stand for indicator, 48 in high, mild steel	Consult
N/A	Mild steel deck with RL35023S stainless steel (cFMus approved) load cells, and hardware	+Consult list price add-on
N/A	Mild steel deck with RLH35 welded seal IP67 stainless steel (FM approved) load cells and hardware	+Consult list price add-on
N/A	Mild steel deck with RL35082 hermetically sealed IP69K stainless steel cFMus approved load cells and hardware	+Consult list price add-on

Dimensions Roughdeck BDP with access ramp

30 in x 31 in models			
A	30.0 in (762 mm)	D	3.31 in (84.1 mm)
B	31.0 in (787.4 mm)	G	30.0 in (762 mm)
C	40.0 in (1016 mm)	H	12.0 in (304.8 mm)
36 in x 37 in models			
A	36.0 in (914.4 mm)	D	3.31 in (84.1 mm)
B	37.0 in (939.8 mm)	G	36.0 in (914.4 mm)
C	46.0 in (1168.4 mm)	H	12.0 in (304.8 mm)

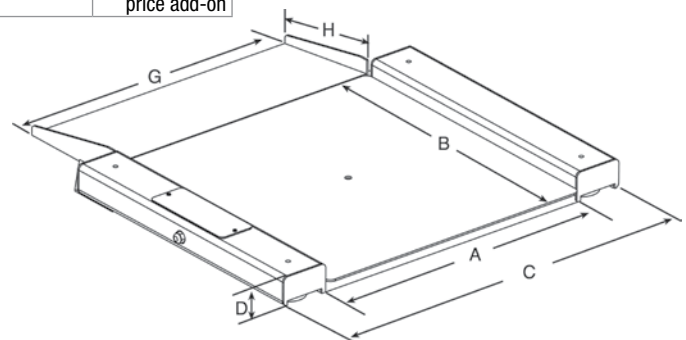

Distance from floor to top of center weighing surface: 1.625 in (41.2 mm)
Distance from floor to bottom of weighing surface: 0.31 in (7.87 mm)

www.weigh-tech.com

Phone: (281) 474-5277

